

Free Space Optics


Cable Free 622



Overview

FSO Technology leverages Infrared beams for communication purposes, and unlike Fibre based systems, does so wirelessly. Speeds in excess of a Gigabit are readily available and distances of 4km are possible.

Our FSO links have been deployed in over 60 countries including major telecom and corporate networks, and have many advanced features which increase flexibility, reliability, performance, management capability and total-cost-of-ownership.

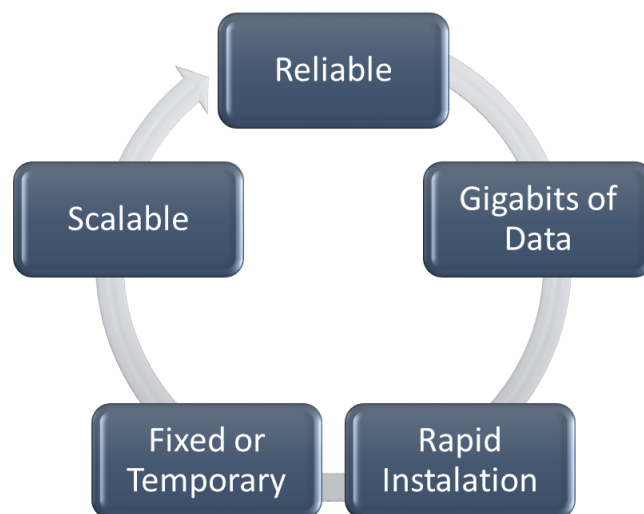

Product No.

Product Code

Description

CF X 00-100-RJ45-ATPC	100Mbps, RJ45 Interface, ATPC
CF X 00-100-MMST-ATPC	100Mbps, Multimode ST Interface, ATPC
CF X 00-155-MMSC-ATPC	155Mbps, Multimode SC Interface, ATPC
CF X 00-155-SMSC-ATPC	155Mbps, Singlemode SC Interface, ATPC
CF X 00-622-MMSC-ATPC	622Mbps, Multimode SC Interface, ATPC
CF X 00-622-SMSC-ATPC	622Mbps, Singlemode SC Interface, ATPC
CF X 00-100-RJ45-LH	100Mbps, RJ45 Interface, No ATPC
CF X 00- 100-MMST-LH	100Mbps, Multimode ST Interface, No ATPC

X: Variable value. 2, 5, 10 or 15 specify range variant. For LH versions use 2 or 5 ONLY

Specifications

System Variant	CF200	CF200-LH	CF500	CF500-LH	CF1000	CF1500
Performance						
Range	200m	200m	500m	500m	1,000m	1,500m
Bandwidth	622Mbps	100Mbps	622Mbps	100Mbps	622Mbps	622Mbps
Power Consumption	40W	40W	40W	40W	60W	60W
Operating Temperature	-20...+60 °C	-20...+60 °C	-20...+60 °C	-20...+60 °C	-20...+60 °C	-20...+60 °C
ATPC	Yes	No	Yes	No	Yes	Yes
Optical Wavelength	780nm	780nm	780nm	780nm	780nm	780nm
Transmit Power	+14.8dBm	+14.8dBm	+14.8dBm	+14.8dBm	+19.0dBm	+19.0dBm
Number of Lasers	1	1	1	1	3	3
Beam width	8mRad	8mRad	5mRad	5mRad	8mRad	5mRad
Safety Classification	Class 1M (IEC)	Class 1M (IEC)	Class 1M (IEC)	Class 1M (IEC)	Class 1M (IEC)	Class 1M (IEC)
Receiver Type	APD	APD	APD	APD	APD	APD
Mechanical						
Dimensions (mm)	478x233x139	478x233x139	478x233x139	478x233x139	522.5x371x211	522.5x371x211
Weight	4.2kg	4.2kg	4.2kg	4.2kg	9.0kg	9.0kg

Accessories

- Mounting Brackets: Wall, Roof, Pole, Tower or Tripod mount options available
- Indoor unit: Indoor network termination and SNMP V2 management interface. See SmartAgent
- Alignment kit: Display of Local & Remote signal levels
- Management Suite: Full range of solutions including LinkManager™, AlarmView™, ClusterManager™, GSM modem

System Specifications

- Environmental: IP65 weather-sealed unit
- Power supply: Options for 115V ac, 230V ac, 48V dc
- Alignment: Mechanical sight, 10-stage RSSI meter, FM audio circuit & tones, handheld test set.